




## DISCLAIMER

This document or some parts of it may not be accessible when using adaptive technology.

If you require assistance with accessing the content of the document, please contact us and quote the document name and the web page you found it on:

- email: Planning – [planning.admin@ashfield.gov.uk](mailto:planning.admin@ashfield.gov.uk)

## APPENDIX A

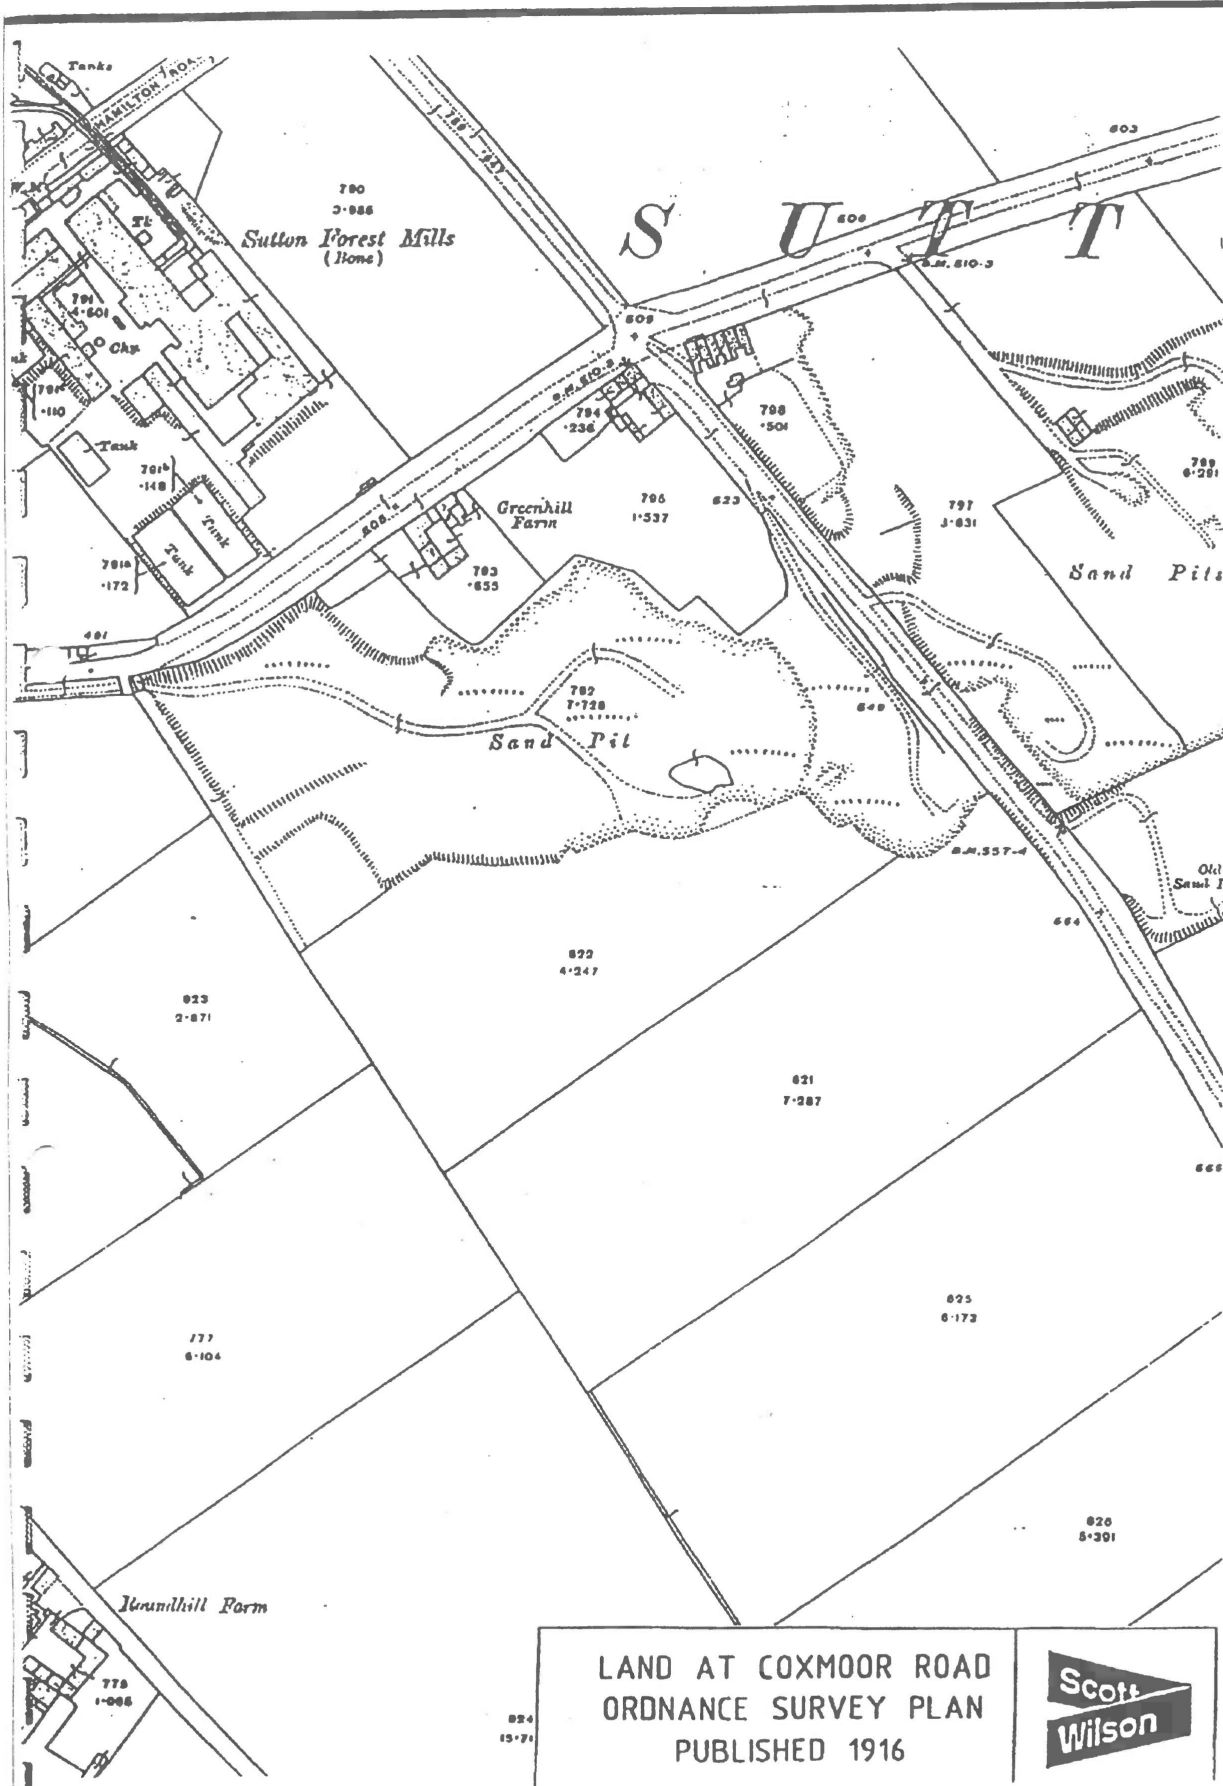





LAND AT COXMOOR ROAD  
ORDNANCE SURVEY PLAN  
PUBLISHED 1920


Scott  
Wilson




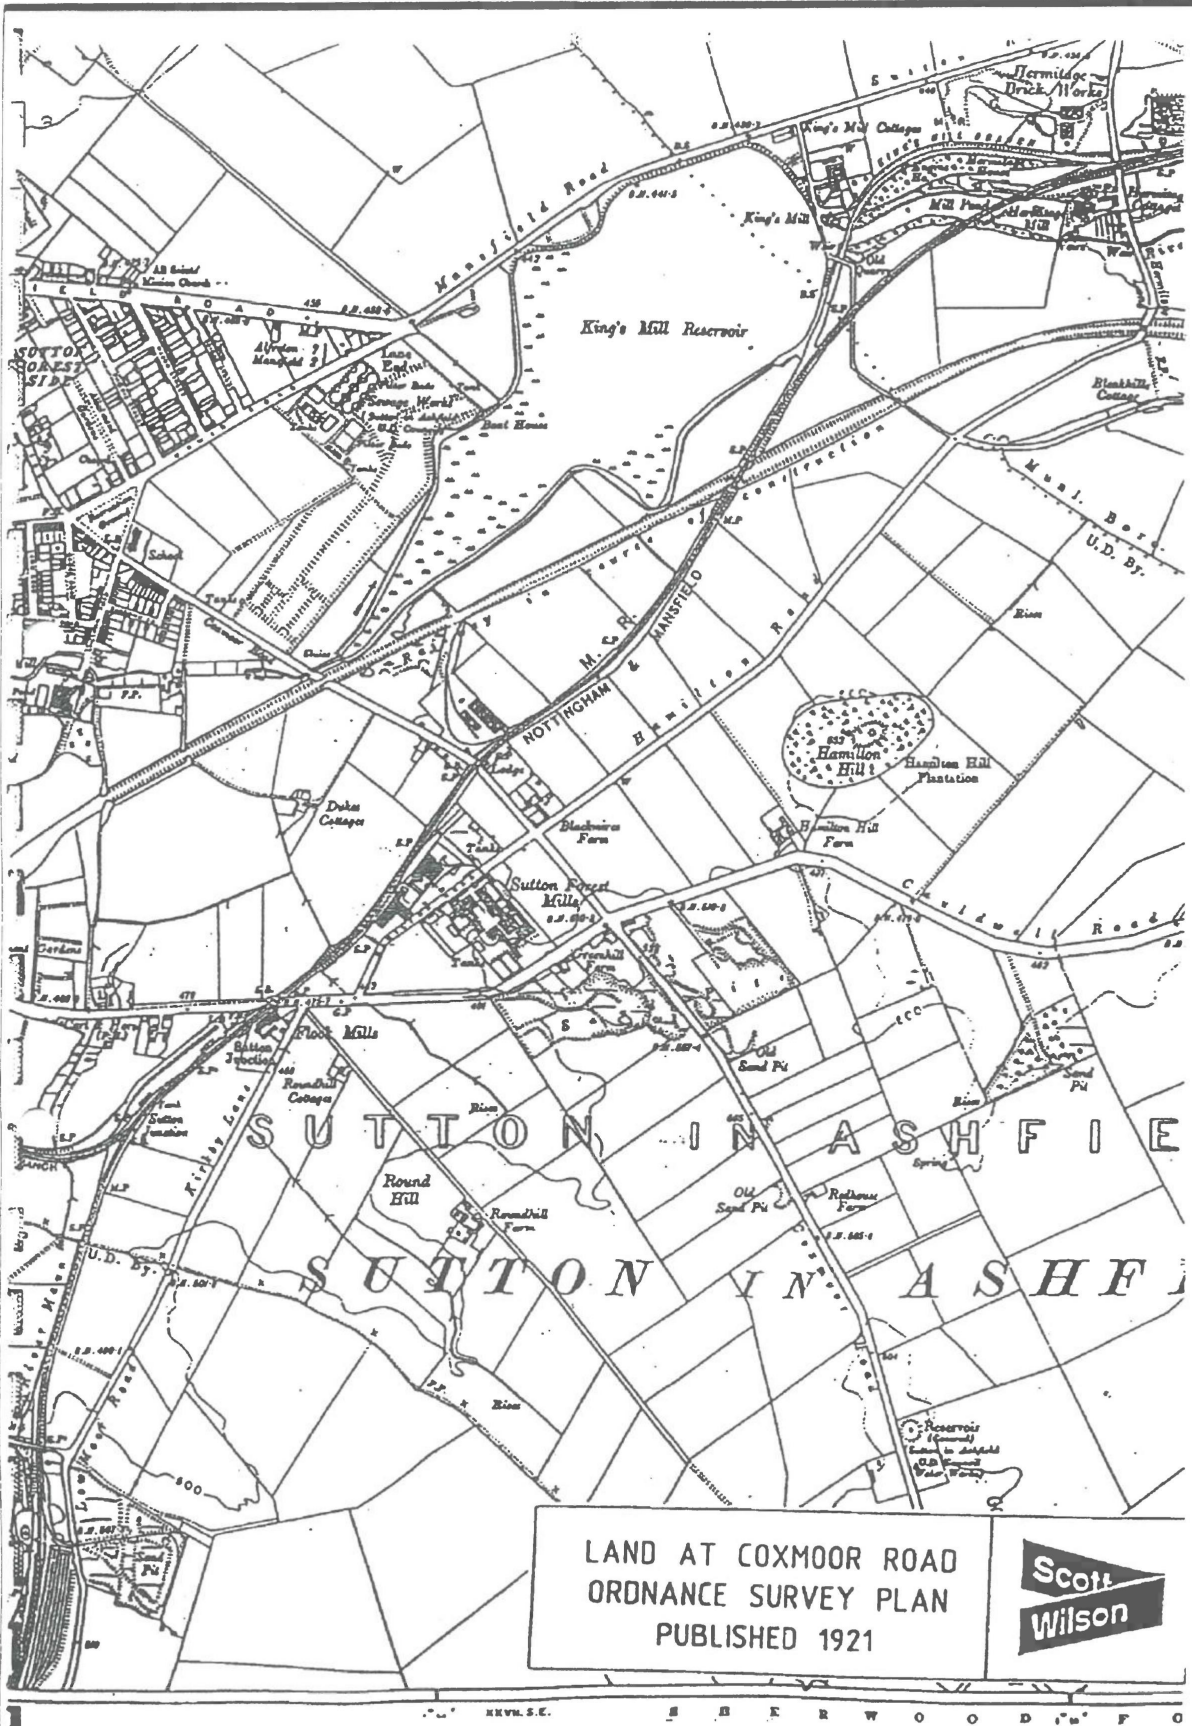

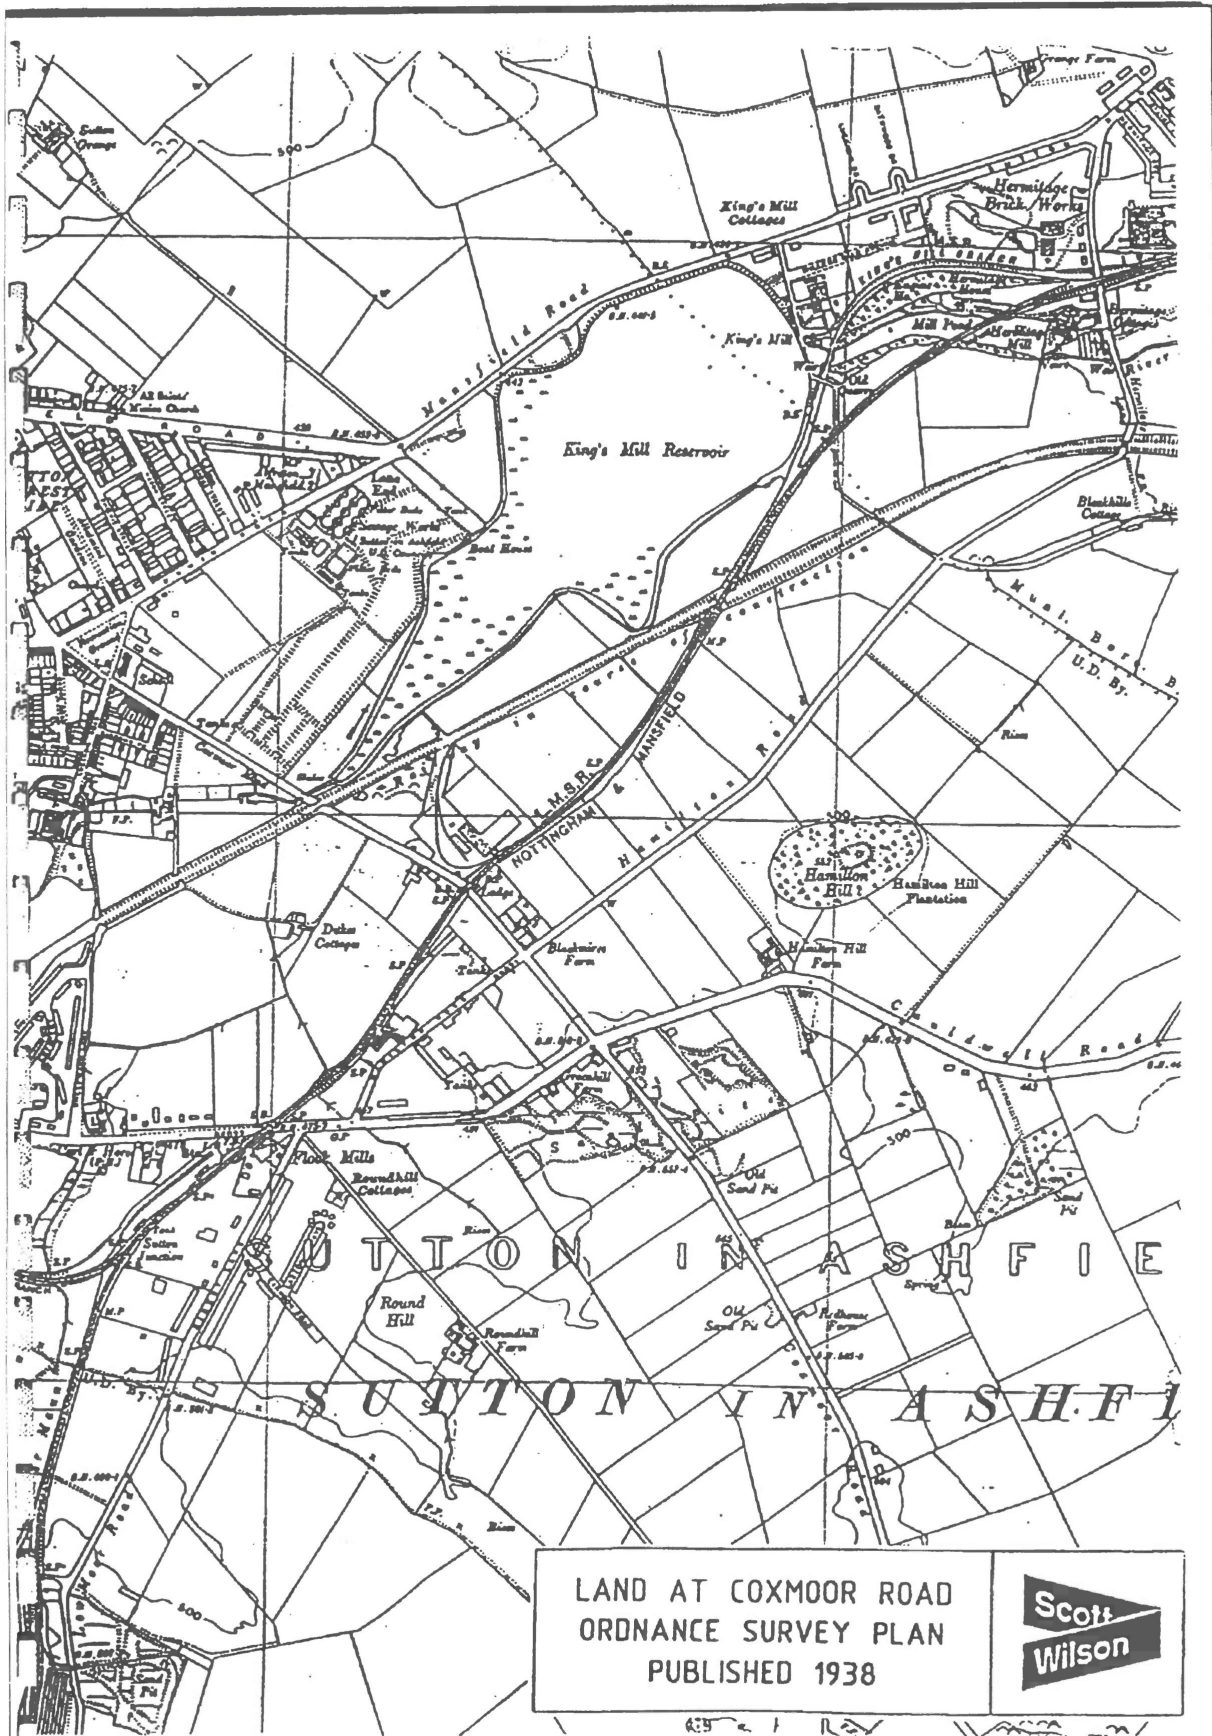




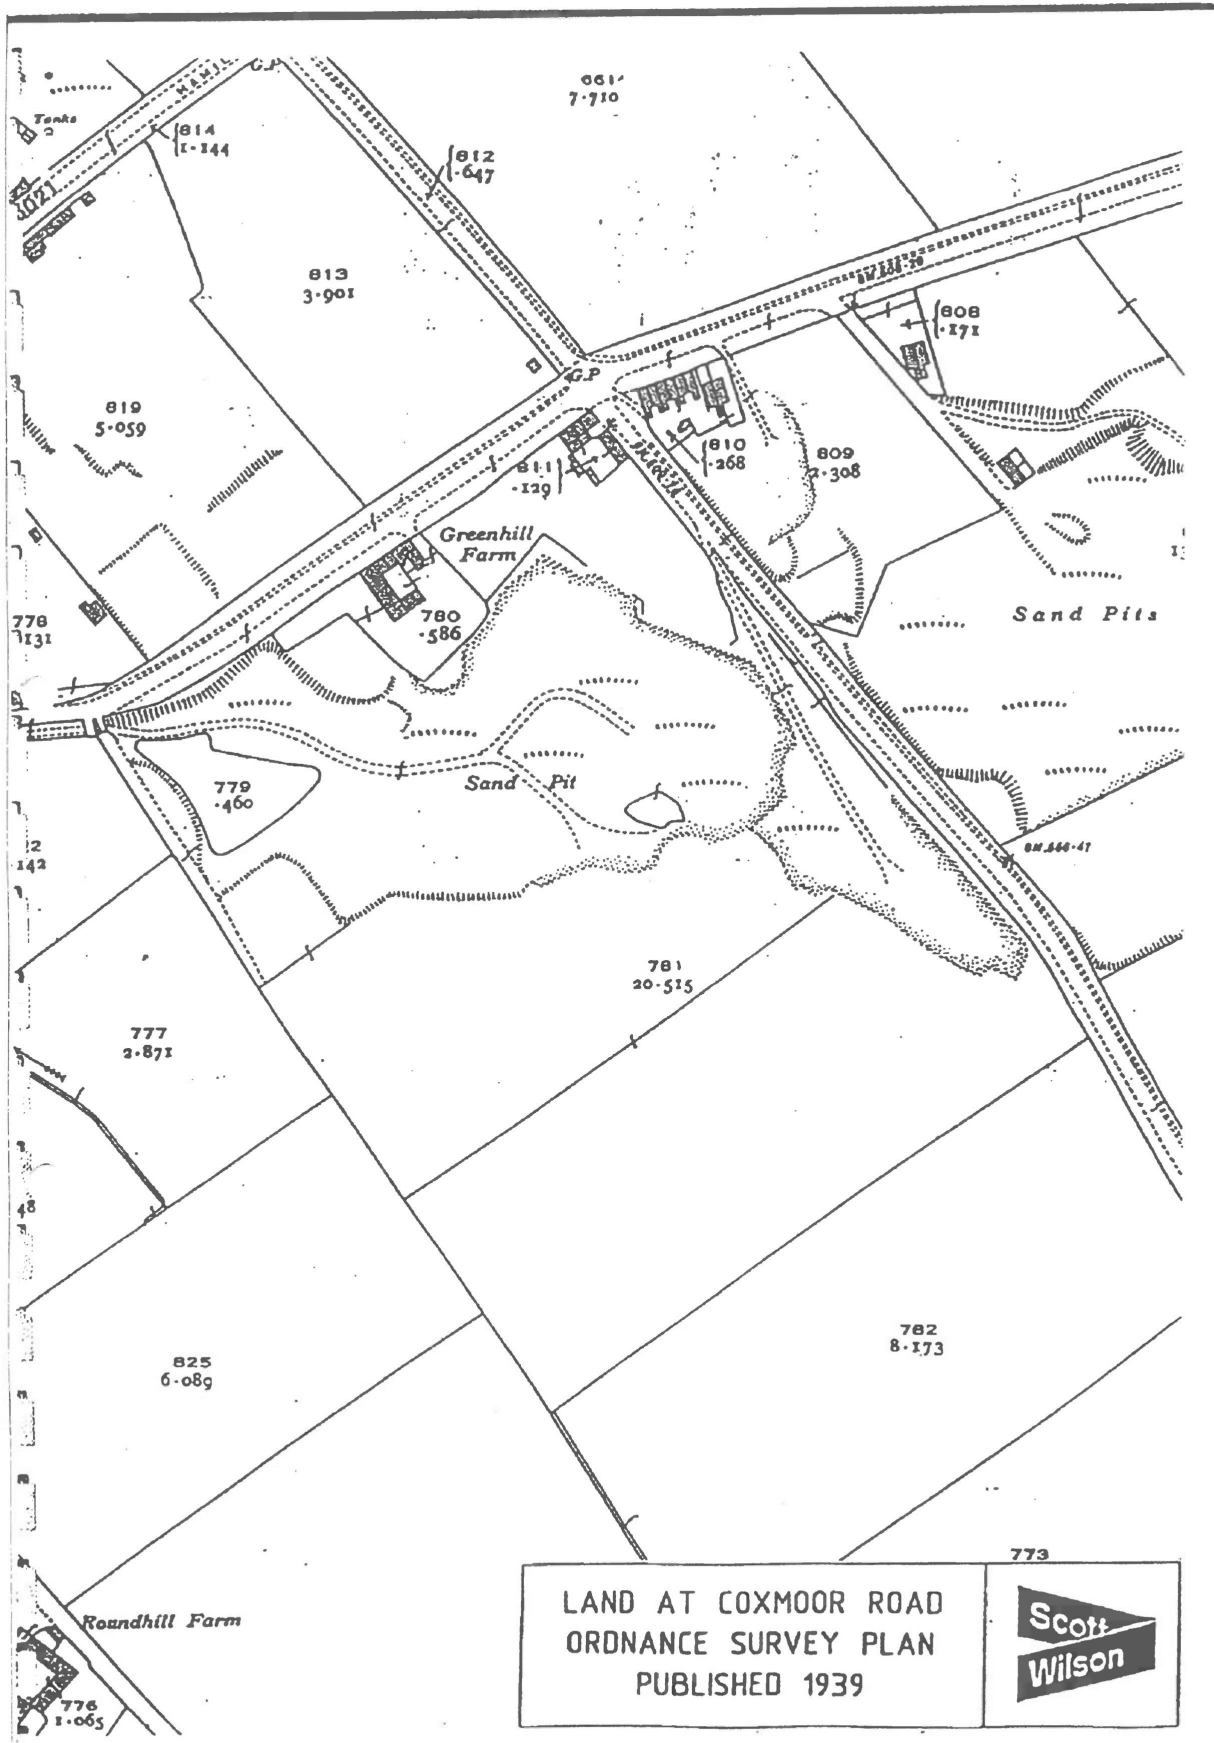

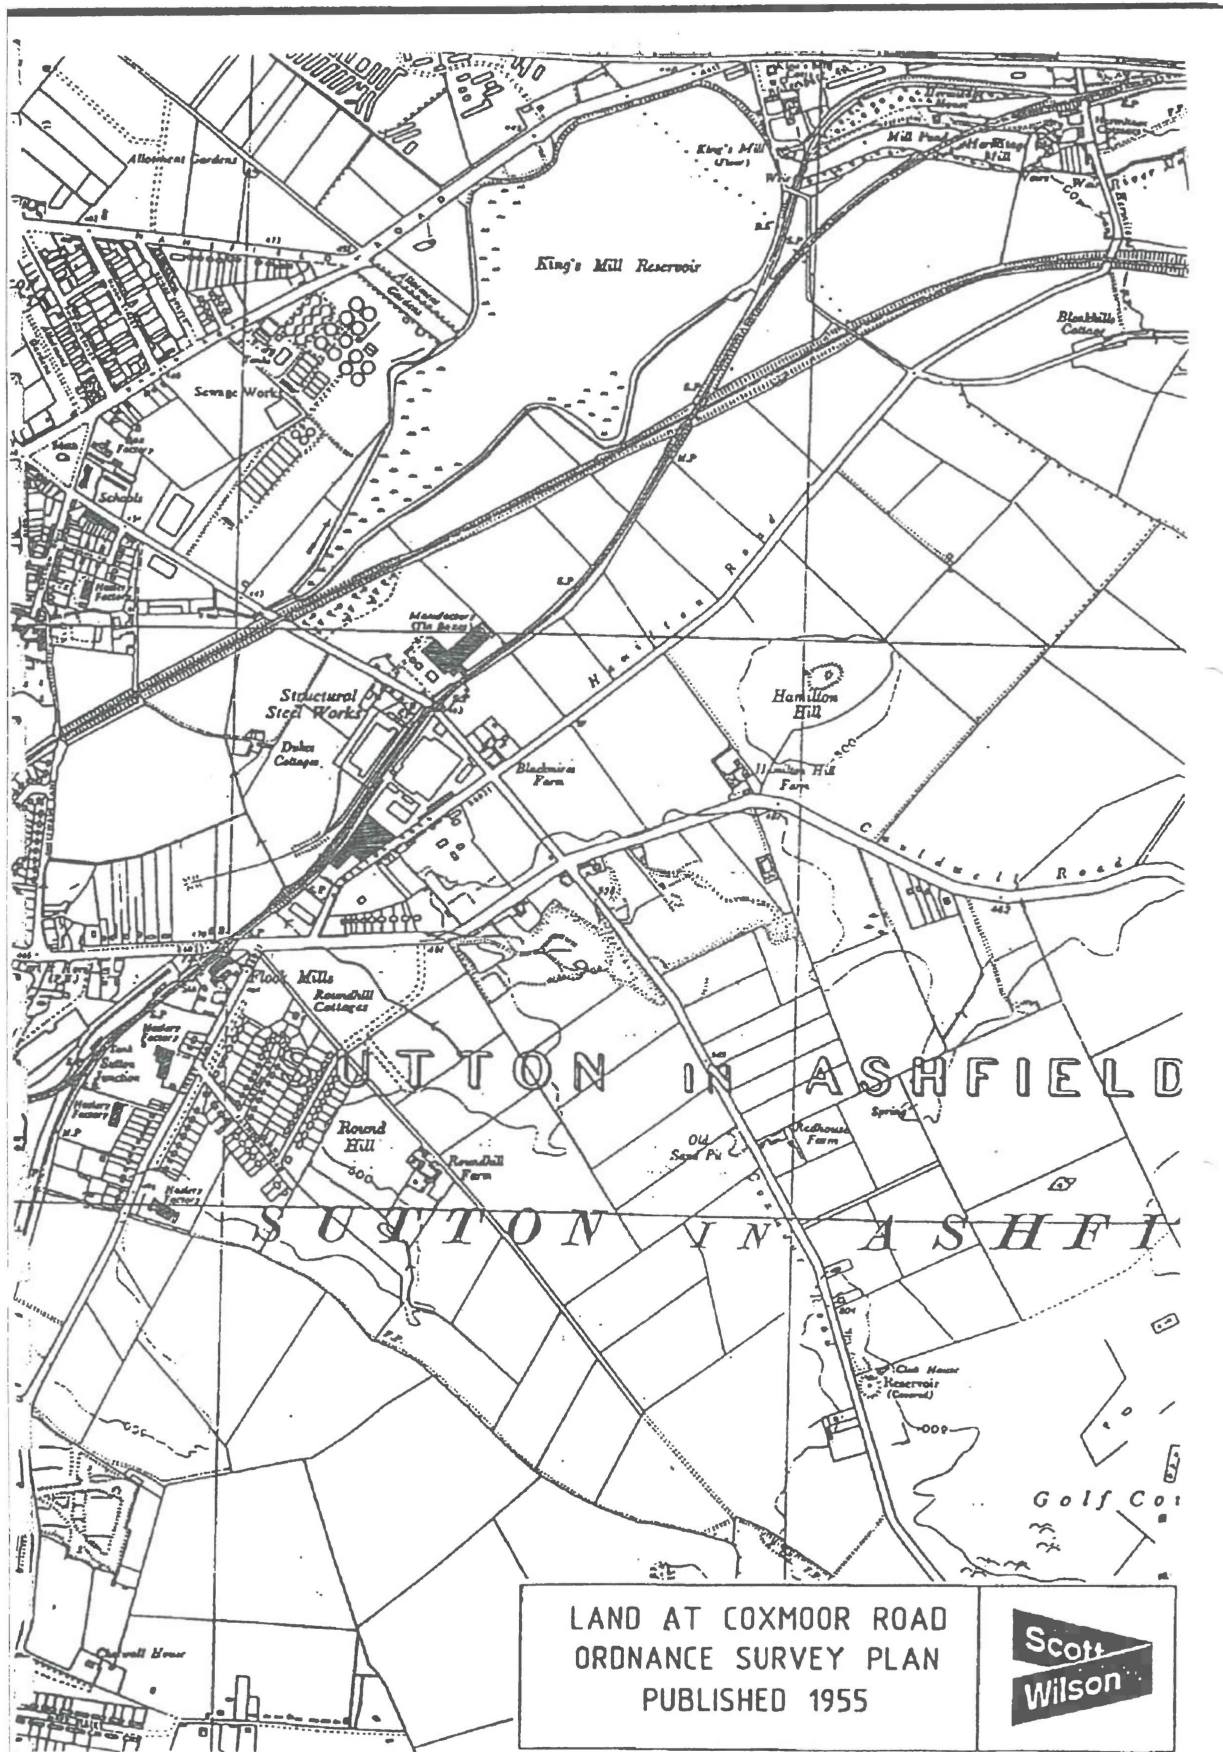






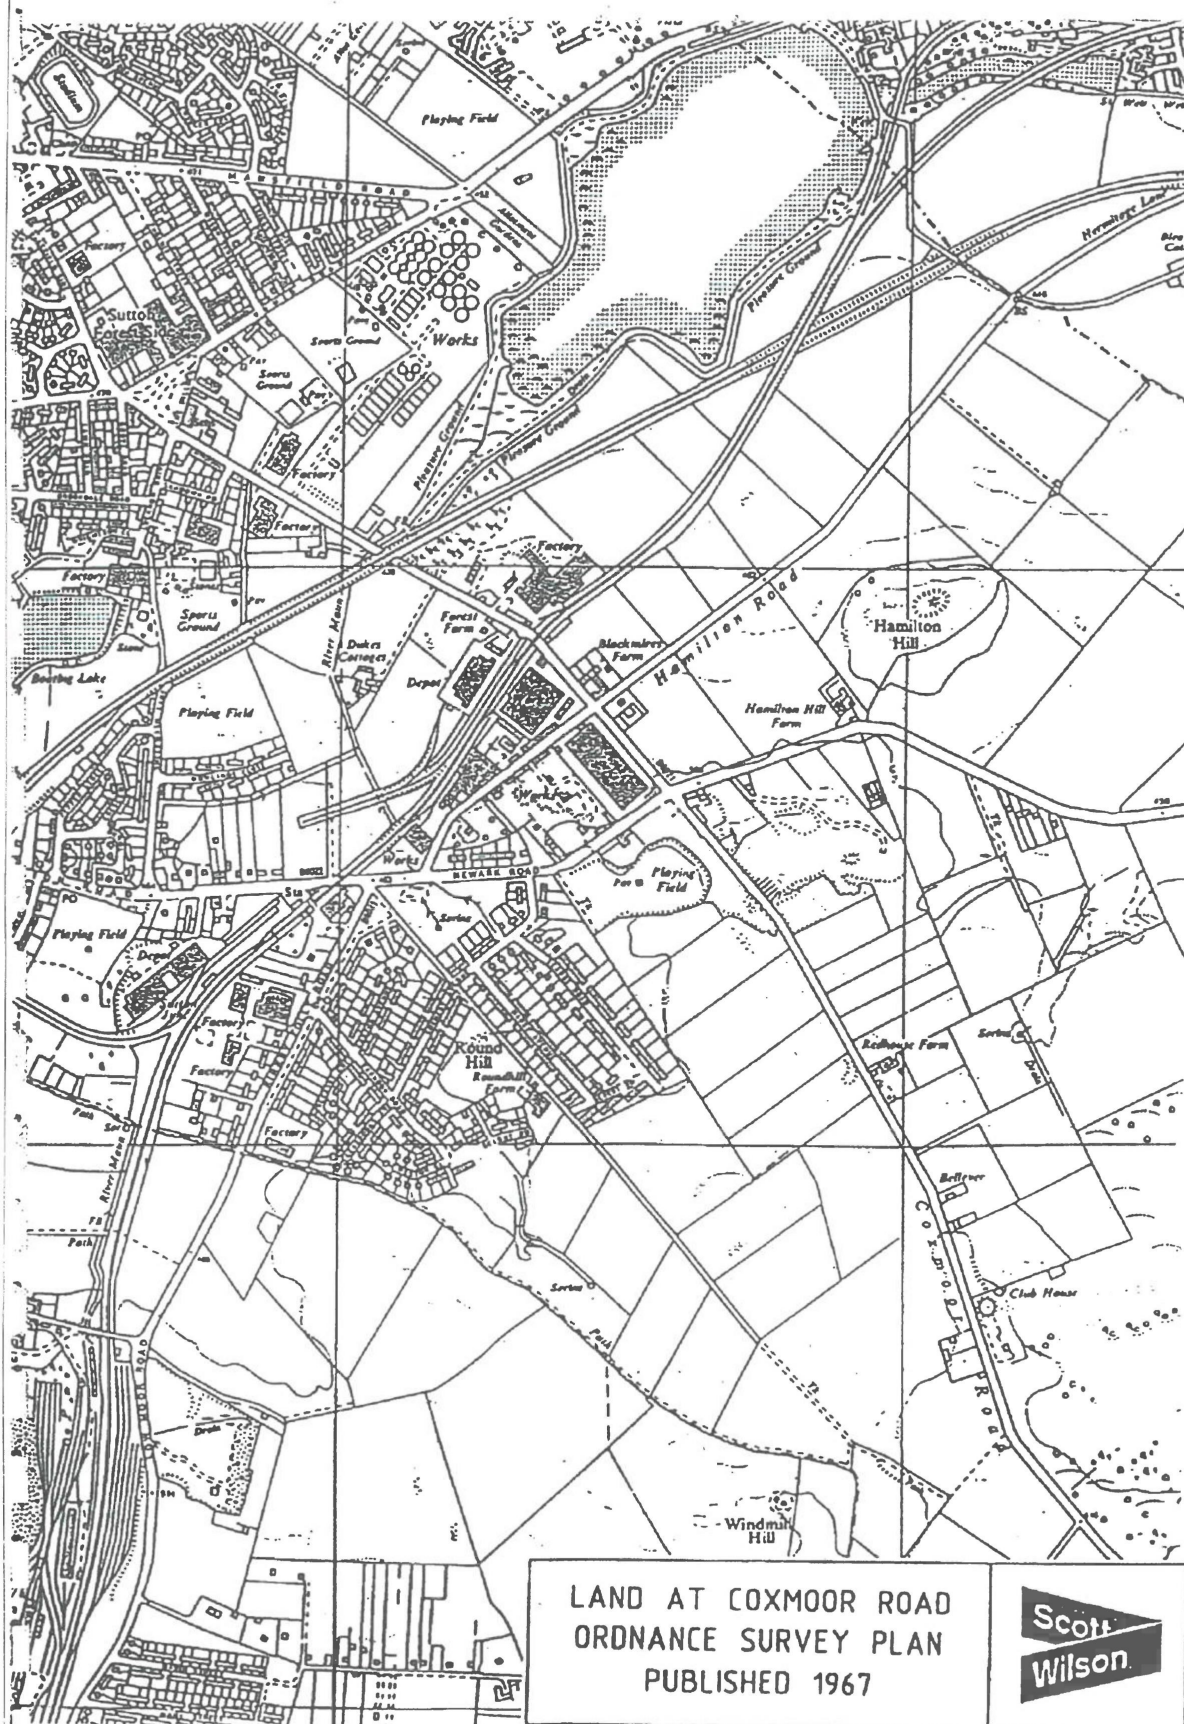





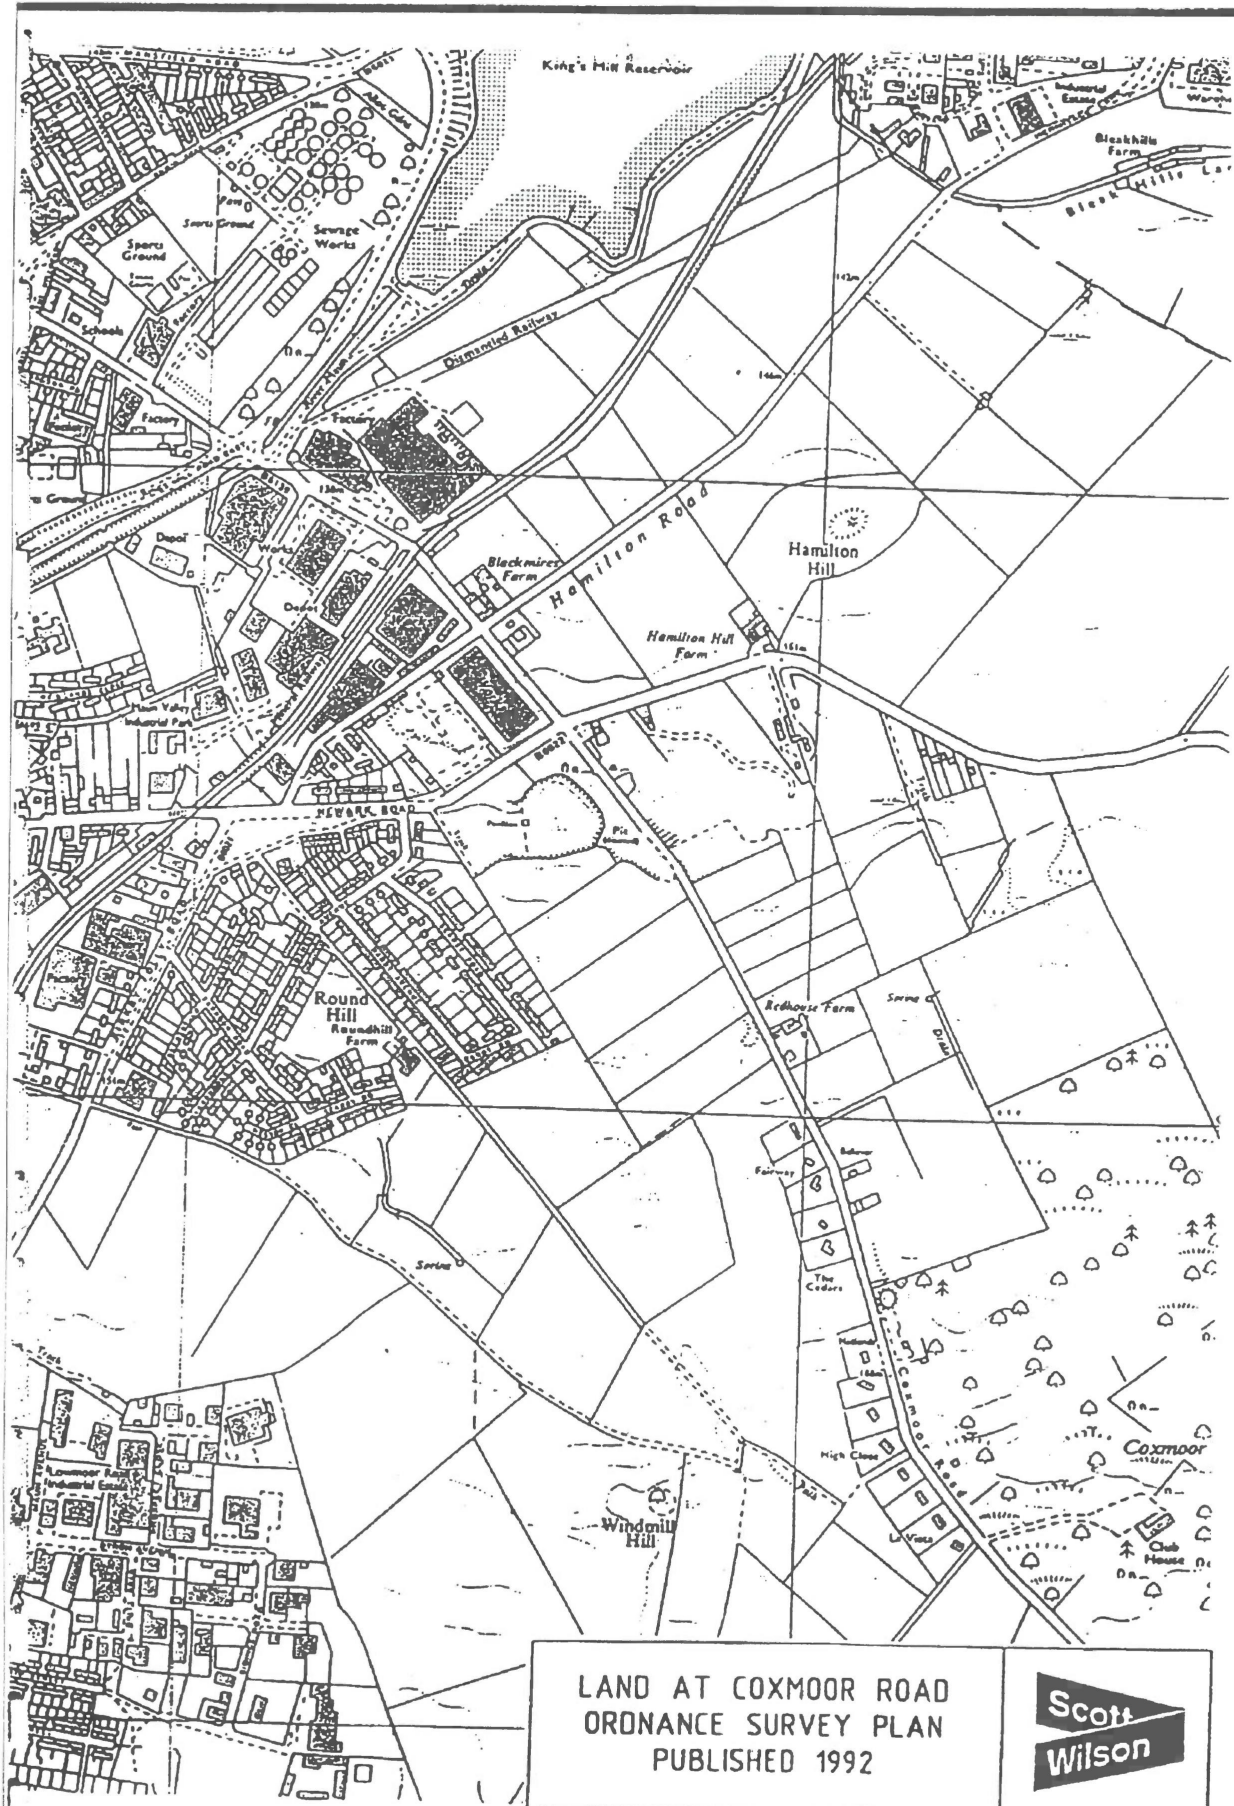

LAND AT COXMOOR ROAD  
ORDNANCE SURVEY PLAN  
PUBLISHED 1992

Scott  
Wilson



**APPENDIX B**



Norwest Holst Soil Engineering Ltd.  
BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

1

Header

|              |                                  |              |                  |                |             |
|--------------|----------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                           | Method       | Cable Percussion | Coordinates    | 1000.0 E    |
| Project      | Sutton-in-Ashfield,<br>Mansfield |              |                  |                | 3000.0 N    |
| Client       |                                  | Drilling Rig | Dando            | Ground Level   | 156.17m AOD |
|              |                                  | Driller      | ID               | Orientation    | Vertical    |
| Consultant   | Scott Wilson Kirkpatrick         | Logged by    | LN               | Date Started   | 10/02/1998  |
|              |                                  |              |                  | Date Completed | 10/02/1998  |

| PROGRESS   |      |            |              |             |         | DRILLING DETAILS    |                   |                  |         |
|------------|------|------------|--------------|-------------|---------|---------------------|-------------------|------------------|---------|
| Date       | Time | Hole depth | Casing depth | Water depth | Remarks | Hardness from depth | Hardness to depth | Chiselling hours | Remarks |
| 10/02/1998 | 1800 | 7.60       | 7.40         | Dry         |         | 7.30                | 7.60              | 1.00             |         |

| CASING        |                           |                 |                             | WATER STRIKES |      |                 |               |                    |      |                             |                           |
|---------------|---------------------------|-----------------|-----------------------------|---------------|------|-----------------|---------------|--------------------|------|-----------------------------|---------------------------|
| Hole diameter | Max depth of hole at dia. | Casing diameter | Max depth of casing at dia. | Date          | Time | Strike at depth | Rise to depth | Time taken to rise | Flow | Casing depth at strike time | Casing depth to seal flow |
| 150           | 7.60                      | 150             | 7.40                        |               |      |                 |               |                    |      |                             |                           |

| GENERAL NOTES |  | SPT DETAILS           |      |                                          |
|---------------|--|-----------------------|------|------------------------------------------|
|               |  | Depth                 | Type | Incremental blow count/penetration in mm |
|               |  | 0.50                  | S    | N=8 (1,1,2,2,2,2)                        |
|               |  | 1.50                  | S    | N=22 (1,2,3,3,6,10)                      |
|               |  | 2.50                  | S    | N=6 (3,3,2,1,1,2)                        |
|               |  | 3.50                  | S    | N=7 (3,2,2,1,2,2)                        |
|               |  | 4.50                  | S    | N=9 (1,2,2,3,2,2)                        |
|               |  | 5.50                  | S    | N=6 (2,2,2,1,1,2)                        |
|               |  | 7.00                  | S    | 65/150mm (13,21,27,38)                   |
|               |  | 7.60                  | S    | 50/50mm                                  |
|               |  | * Seating blows only. |      |                                          |

NB All depths in metres, all diameters in millimetres,  
water strike rise time in minutes, chiselling time in hours.

Form CP HEADER

Version 2.00

Revised 25/06/1997





# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.  
1  
Sheet 1 of 1

|              |                               |              |                  |                |             |
|--------------|-------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                        | Method       | Cable Percussion | Coordinates    | 1000.0 E    |
| Project      | Sutton-in-Ashfield, Mansfield | Drilling Rig | Dando            |                | 3000.0 N    |
|              |                               | Driller      | ID               | Ground Level   | 156.17m AOD |
| Client       |                               | Logged by    | LN               | Orientation    | Vertical    |
|              |                               |              |                  | Date Started   | 10/02/1998  |
| Consultant   | Scott Wilson Kirkpatrick      |              |                  | Date Completed | 10/02/1998  |

| Description of Strata                                                                                                                                          | Legend | Depth Below G.L. | O.D. Level | Sampling                                        | SPT N & (U blows) | SPT type & depth | Installation |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------------------|------------|-------------------------------------------------|-------------------|------------------|--------------|
| MADE GROUND: Reddish brown very sandy clay.                                                                                                                    |        | 0.80             | 155.37     |                                                 | 58                | S 0.30           |              |
| MADE GROUND: Dark brown mottled light brown and black sandy clay with much fine to coarse subangular to subrounded gravel size fragments of brick and clinker. |        | 1.80             | 154.37     | B 1.00 - 1.50                                   | 522               | S 1.50           |              |
| MADE GROUND: Black and yellowish brown sand and gravel with gravel sized fragments of brick pieces of cloth and plastic.                                       |        | 4.20             | 151.97     | B 2.00 - 2.50<br>B 3.00 - 3.50<br>B 4.00 - 4.50 | 56<br>57          | S 2.50<br>S 3.50 |              |
| MADE GROUND: Reddish brown clayey sand with occasional gravel size fragments of brick.                                                                         |        | 7.00             | 149.17     | B 5.00 - 5.50<br>B 6.20 - 6.70                  | 39<br>56          | S 4.50<br>S 5.50 |              |
| Dense reddish brown SAND with occasional medium angular gravel. (Chemical odour)                                                                               |        | 7.60             | 148.57     | B 7.30 - 7.60                                   | 565/150mm         | S 7.00           |              |
| Cable Percussion boring complete at 7.60 m.                                                                                                                    |        |                  |            |                                                 | 550/30mm          | S 7.60           |              |

NB All depths in metres, all diameters in millimetres.  
See header sheet for details of drilling, progress and water strikes. See legend sheet for key to symbols.

|         |            |
|---------|------------|
| Form    | NH CP LOG  |
| Version | 2.00       |
| Revised | 19/12/1996 |



# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

2

Header

|              |                                  |              |                  |                |             |
|--------------|----------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                           | Method       | Cable Percussion | Coordinates    | 9600.6 E    |
| Project      | Sutton-in-Ashfield,<br>Mansfield |              |                  |                | 2906.0 N    |
| Client       |                                  | Drilling Rig | Dando            | Ground Level   | 150.70m AOD |
|              |                                  | Driller      | ID               | Orientation    | Vertical    |
| Consultant   | Scott Wilson Kirkpatrick         | Logged by    | LN               | Date Started   | 11/02/1998  |
|              |                                  |              |                  | Date Completed | 11/02/1998  |

| PROGRESS   |      |            |              |             |         | DRILLING DETAILS    |                   |                  |         |
|------------|------|------------|--------------|-------------|---------|---------------------|-------------------|------------------|---------|
| Date       | Time | Hole depth | Casing depth | Water depth | Remarks | Hardness from depth | Hardness to depth | Chiselling hours | Remarks |
| 11/02/1998 | 1800 | 5.70       | 5.50         | 5.50        |         |                     |                   |                  |         |

| CASING        |                           |                 |                             | WATER STRIKES |      |                 |               |                    |         |                             |                           |
|---------------|---------------------------|-----------------|-----------------------------|---------------|------|-----------------|---------------|--------------------|---------|-----------------------------|---------------------------|
| Hole diameter | Max depth of hole at dia. | Casing diameter | Max depth of casing of dia. | Date          | Time | Strike at depth | Rise to depth | Time taken to rise | Flow    | Casing depth at strike time | Casing depth to next flow |
| 150           | 5.70                      | 150             | 5.50                        | 11/02/1998    | 0000 | 4.80            | NR            | NR                 | Seepage | 4.50                        | NR                        |

| GENERAL NOTES |  | SPT DETAILS |      |                                          |
|---------------|--|-------------|------|------------------------------------------|
|               |  | Depth       | Type | Incremental blow count/penetration in mm |
|               |  | 0.50        | S    | N=7 (1,1,1,2,2,2)                        |
|               |  | 1.50        | S    | N=24 (6,9,6,5,6,7)                       |
|               |  | 2.50        | S    | N=6 (1,1,1,2,1,2)                        |
|               |  | 3.50        | S    | N=19 (3,3,4,3,5,5)                       |
|               |  | 4.50        | S    | 30/22mm                                  |
|               |  | 5.50        | S    | 68/150mm                                 |
|               |  |             |      | * Seating blows only.                    |

NB All depths in metres, all diameters in millimetres,  
water strike rise time in minutes, chiselling time in hours.

|         |            |
|---------|------------|
| Form    | CP HEADER  |
| Version | 2.00       |
| Revised | 15/06/1997 |



# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

2

Sheet 1 of 1

|              |                               |              |                  |                |             |
|--------------|-------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                        | Method       | Cable Percussion | Coordinates    | 9600.6 E    |
| Project      | Sutton-in-Ashfield, Mansfield | Drilling Rig | Dando            |                | 2906.0 N    |
|              |                               | Driller      | ID               | Ground Level   | 150.70m AOD |
| Client       |                               | Logged by    | LN               | Orientation    | Vertical    |
|              |                               |              |                  | Date Started   | 11/02/1998  |
| Consultant   | Scott Wilson Kirkpatrick      |              |                  | Date Completed | 11/02/1998  |

| Description of Strata                                                                                                                 | Legend | Depth Below G.L. | O.D. Level | Sampling      | SPT N & (U blows) | SPT type & depth | Installation |
|---------------------------------------------------------------------------------------------------------------------------------------|--------|------------------|------------|---------------|-------------------|------------------|--------------|
| MADE GROUND: Reddish brown clayey sand with much fine to medium subangular to subrounded gravel.                                      |        |                  |            |               | S7                | S 0.50           |              |
|                                                                                                                                       |        |                  |            | B 1.00 - 1.50 |                   | 0.95             |              |
|                                                                                                                                       |        | 1.70             | 149.00     |               | S24               | S 1.50           |              |
|                                                                                                                                       |        |                  |            | B 2.00 - 2.50 |                   | 1.95             |              |
| MADE GROUND: Dark brown mottled black very sandy clay with much fine to medium subangular gravel and gravel sized fragments of brick. |        |                  |            |               | S6                | S 2.50           |              |
|                                                                                                                                       |        |                  |            | B 3.00 - 3.50 |                   | 2.95             |              |
|                                                                                                                                       |        | 3.60             | 147.10     |               | S19               | S 3.50           |              |
| MADE GROUND: Yellowish brown mottled greyish green clayey sand.                                                                       |        |                  |            | B 4.00 - 4.50 |                   | 3.95             |              |
|                                                                                                                                       |        | 4.30             | 146.40     |               |                   |                  |              |
| Dense reddish brown SAND.                                                                                                             |        |                  |            | B 4.50 - 5.00 | S30/225mm         | S 4.50           |              |
|                                                                                                                                       |        |                  |            | B 5.00 - 5.50 |                   | 4.73             |              |
|                                                                                                                                       |        |                  |            |               | S68/150mm         | S 5.50           |              |
|                                                                                                                                       |        | 5.70             | 145.00     |               |                   | 5.63             |              |
| Cable Percussion boring complete at 5.70 m.                                                                                           |        |                  |            |               |                   |                  |              |

NB All depths in metres, all diameters in millimetres.  
See header sheet for details of drilling, progress and water strikes. See legend sheet for key to symbols.

Form NH CP LOG

Version 2.00





# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

3

Header

|              |                                  |              |                  |                |             |
|--------------|----------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                           | Method       | Cable Percussion | Coordinates    | 9998.9 E    |
| Project      | Sutton-in-Ashfield,<br>Mansfield |              |                  |                | 3038.4 N    |
| Client       |                                  | Drilling Rig | Dando            | Ground Level   | 156.64m AOD |
|              |                                  | Driller      | ID               | Orientation    | Vertical    |
|              |                                  | Logged by    | LN               | Date Started   | 11/02/1998  |
| Consultant   | Scott Wilson Kirkpatrick         |              |                  | Date Completed | 11/02/1998  |

| PROGRESS   |      |            |              |             |         | DRILLING DETAILS    |                   |                  |         |
|------------|------|------------|--------------|-------------|---------|---------------------|-------------------|------------------|---------|
| Date       | Time | Hole depth | Casing depth | Water depth | Remarks | Hardness from depth | Hardness to depth | Chiselling hours | Remarks |
| 11/02/1998 | 0000 | 1.80       | 1.70         | Dry         |         | 1.80                | 1.80              | 0.50             |         |

| CASING        |                           |                 |                             | WATER STRIKES |      |                 |               |                    |      |                             |                           |
|---------------|---------------------------|-----------------|-----------------------------|---------------|------|-----------------|---------------|--------------------|------|-----------------------------|---------------------------|
| Hole diameter | Max depth of hole at dia. | Casing diameter | Max depth of casing of dia. | Date          | Time | Strike at depth | Rise to depth | Time taken to rise | Flow | Casing depth at strike time | Casing depth to seal flow |
|               |                           |                 |                             |               |      |                 |               |                    |      |                             |                           |

| GENERAL NOTES                                                 |  | SPT DETAILS           |      |                                          |
|---------------------------------------------------------------|--|-----------------------|------|------------------------------------------|
| Borehole terminated at 1.80m, due to obstruction moved to 3A. |  | Depth                 | Type | Incremental blow count/penetration in mm |
|                                                               |  | 0.50                  | S    | N=9 (2,1,2,2,2,3)                        |
|                                                               |  | 1.50                  | S    | 76/75mm (12,12,46,30)                    |
|                                                               |  | * Seating blows only. |      |                                          |

NB All depths in metres, all diameters in millimetres,  
water strike rise time in minutes, chiselling time in hours.

|         |            |
|---------|------------|
| Form    | CP HEADER  |
| Version | 2.00       |
| Revised | 15/06/1997 |



# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

3

Sheet 1 of 1

|              |                               |              |                  |                |             |
|--------------|-------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                        | Method       | Cable Percussion | Coordinates    | 9998.9 E    |
| Project      | Sutton-in-Ashfield, Mansfield | Drilling Rig | Dando            |                | 3038.4 N    |
| Client       |                               | Driller      | ID               | Ground Level   | 156.64m AOD |
|              |                               | Logged by    | LN               | Orientation    | Vertical    |
| Consultant   | Scott Wilson Kirkpatrick      |              |                  | Date Started   | 11/02/1998  |
|              |                               |              |                  | Date Completed | 11/02/1998  |

| Description of Strata                                                                                         | Legend | Depth<br>Below<br>G.L. | O.D.<br>Level | Sampling      | SPT N &<br>(U blows) | SPT type<br>& depth | Install-<br>ation |
|---------------------------------------------------------------------------------------------------------------|--------|------------------------|---------------|---------------|----------------------|---------------------|-------------------|
| MADE GROUND: Reddish brown clayey sand with much fine to medium subangular to subrounded gravel.              |        |                        |               |               | 59                   | S 0.50<br>0.93      |                   |
|                                                                                                               |        | 1.20                   | 155.44        | B 1.00 - 1.50 |                      |                     |                   |
| MADE GROUND: Reddish brown and black sand with fine to coarse gravel sized fragments of terrane and concrete. |        | 1.80                   | 154.84        |               | 576/73mm             | S 1.50<br>1.73      |                   |
| Cable Percussion boring complete at 1.80 m.                                                                   |        |                        |               |               |                      |                     |                   |

NB All depths in metres, all diameters in millimetres.

See header sheet for details of drilling, progress and water strikes. See legend sheet for key to symbols.

Form NH CP LOG

Version 2.00

Revised 19/12/1996



# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

3A

Header

|              |                                  |              |                  |                |            |
|--------------|----------------------------------|--------------|------------------|----------------|------------|
| Contract No. | F11003                           | Method       | Cable Percussion | Coordinates    | 9999.7 E   |
| Project      | Sutton-in-Ashfield,<br>Mansfield | Drilling Rig | Dando            | Ground Level   | 3010.0 N   |
| Client       |                                  | Driller      | ID               | Orientation    | 15.64m AOD |
| Consultant   | Scott Wilson Kirkpatrick         | Logged by    | LN               | Date Started   | 11/02/1998 |
|              |                                  |              |                  | Date Completed | 12/02/1998 |

| PROGRESS   |      |            |              |             |         | DRILLING DETAILS    |                   |                  |         |
|------------|------|------------|--------------|-------------|---------|---------------------|-------------------|------------------|---------|
| Date       | Time | Hole depth | Casing depth | Water depth | Remarks | Hardness from depth | Hardness to depth | Chiselling hours | Remarks |
| 11/02/1998 | 1800 | 8.30       | 7.50         | Dry         |         | 1.70                | 1.80              | 0.50             |         |

| CASING        |                           |                 |                             | WATER STRIKES |      |                 |               |                    |      |                             |                           |
|---------------|---------------------------|-----------------|-----------------------------|---------------|------|-----------------|---------------|--------------------|------|-----------------------------|---------------------------|
| Hole diameter | Max depth of hole at dia. | Casing diameter | Max depth of casing at dia. | Date          | Time | Strike at depth | Rise to depth | Time taken to rise | Flow | Casing depth at strike time | Casing depth to seal flow |
| 150           | 8.30                      | 150             | 7.50                        |               |      |                 |               |                    |      |                             |                           |

| GENERAL NOTES |  | SPT DETAILS           |      |                                          |
|---------------|--|-----------------------|------|------------------------------------------|
|               |  | Depth                 | Type | Incremental blow count/penetration in mm |
|               |  | 2.50                  | S    | N=3 (1,2,1,1,1)                          |
|               |  | 3.50                  | S    | N=5 (1,1,1,1,2)                          |
|               |  | 4.50                  | S    | N=8 (3,2,2,2,2)                          |
|               |  | 5.50                  | S    | N=8 (1,2,2,1,2,3)                        |
|               |  | 7.00                  | S    | N=33 (5,6,8,6,8,11)                      |
|               |  | 8.00                  | S    | 53/25mm (23,22,23,30)                    |
|               |  | * Seating blows only. |      |                                          |

NB All depths in metres, all diameters in millimetres,  
water strike rise time in minutes, chiselling time in hours.

Form CP HEADER

Version 2.00

Revised 15/06/1997





# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

3A

Sheet 1 of 1

|              |                               |              |                  |                |            |
|--------------|-------------------------------|--------------|------------------|----------------|------------|
| Contract No. | F11003                        | Method       | Cable Percussion | Coordinates    | 9999.7 E   |
| Project      | Sutton-in-Ashfield, Mansfield | Drilling Rig | Dando            |                | 3010.0 N   |
|              |                               | Driller      | ID               | Ground Level   | 15.64m AOD |
| Client       |                               | Logged by    | LN               | Orientation    | Vertical   |
|              |                               |              |                  | Date Started   | 11/02/1998 |
| Consultant   | Scott Wilson Kirkpatrick      |              |                  | Date Completed | 12/02/1998 |

| Description of Strata                                                                                                                        | Legend | Depth<br>Below<br>G.L. | O.D.<br>Level | Sampling      | SPT N &<br>(U blows) | SPT type<br>& depth | Installation |
|----------------------------------------------------------------------------------------------------------------------------------------------|--------|------------------------|---------------|---------------|----------------------|---------------------|--------------|
| MADE GROUND: Reddish brown clay and sand fill.<br>(Driller's description)                                                                    |        | 1.20                   | 14.44         |               |                      |                     |              |
| MADE GROUND: Dark brown mottled black sandy clay<br>with much fine to coarse gravel and gravel sized fragments<br>of brick (chemical odour). |        |                        |               | B 2.00 - 2.50 | S3                   | S 2.50              |              |
|                                                                                                                                              |        |                        |               | B 3.00 - 3.50 | S5                   | S 3.50              |              |
| —at 3.50m becomes coarse sand                                                                                                                |        |                        |               | B 4.00 - 4.50 | S8                   | S 4.50              |              |
| —at 4.50m with pieces of plastic                                                                                                             |        |                        |               | B 5.00 - 5.50 | S8                   | S 5.50              |              |
| —at 5.50m with rotten wood                                                                                                                   |        |                        |               | B 6.20 - 6.70 | S33                  | S 7.00              |              |
| —at 7.00m becomes reddish brown, sandy                                                                                                       |        | 7.40                   | 8.24          |               |                      |                     |              |
| Reddish brown moderately weathered MUDSTONE.                                                                                                 |        | 7.90                   | 7.74          | D 7.70        | S53/125mm            | S 8.00              |              |
| Reddish brown highly weathered sandy MUDSTONE.                                                                                               |        | 8.30                   | 7.34          |               |                      |                     |              |
| Cable Percussion boring complete at 8.30 m.                                                                                                  |        |                        |               |               |                      |                     |              |

NB All depths in metres, all diameters in millimetres.  
See header sheet for details of drilling, progress and water  
strikes. See legend sheet for key to symbols.

Form NH CP LOG

Version 2.00

Revised 10/11/00



# Norwest Holst Soil Engineering Ltd.

## BOREHOLE LOG - CABLE PERCUSSION

Borehole No.

4

Header

|              |                                  |              |                  |                |             |
|--------------|----------------------------------|--------------|------------------|----------------|-------------|
| Contract No. | F11003                           | Method       | Cable Percussion | Coordinates    | 1170.9 E    |
| Project      | Sutton-in-Ashfield,<br>Mansfield | Drilling Rig | Dando            | Ground Level   | 3008.7 N    |
| Client       |                                  | Driller      | ID               | Orientation    | 165.20m AOD |
| Consultant   | Scott Wilson Kirkpatrick         | Logged by    | LN               | Date Started   | Vertical    |
|              |                                  |              |                  | Date Completed | 12/02/1998  |

| PROGRESS   |      |            |              |             | DRILLING DETAILS |                      |                      |                      |
|------------|------|------------|--------------|-------------|------------------|----------------------|----------------------|----------------------|
| Date       | Time | Bore depth | Casing depth | Water depth | Remarks          | Hardness from depth  | Hardness to depth    | Chiselling hours     |
| 12/02/1998 | 1800 | 10.00      | 7.50         | Dry         |                  | 2.50<br>3.20<br>3.50 | 2.80<br>3.30<br>3.80 | 0.75<br>0.50<br>0.75 |

| CASING        |                           |                 |                             | WATER STRIKES |      |                 |               |                    |      |                             |                           |
|---------------|---------------------------|-----------------|-----------------------------|---------------|------|-----------------|---------------|--------------------|------|-----------------------------|---------------------------|
| Bore diameter | Max depth of hole at dia. | Casing diameter | Max depth of casing of dia. | Date          | Time | Strike at depth | Rise to depth | Time taken to rise | Flow | Casing depth at strike time | Casing depth to seal flow |
| 150           | 10.00                     | 150             | 7.50                        |               |      |                 |               |                    |      |                             |                           |

| GENERAL NOTES |  |  |  | SPT DETAILS           |      |                                          |
|---------------|--|--|--|-----------------------|------|------------------------------------------|
|               |  |  |  | Depth                 | Type | Incremental blow count/penetration in mm |
|               |  |  |  | 0.50                  | S    | N=6 (1,1,2,2,1,1)                        |
|               |  |  |  | 1.50                  | S    | N=29 (2,3,3,5,9,12)                      |
|               |  |  |  | 2.50                  | S    | 300mm                                    |
|               |  |  |  | 3.50                  | S    | 300mm                                    |
|               |  |  |  | 4.50                  | S    | N=29 (5,4,6,7,9,7)                       |
|               |  |  |  | 5.50                  | S    | N=15 (2,3,4,4,4,3)                       |
|               |  |  |  | 7.00                  | S    | N=12 (2,3,3,3,3,3)                       |
|               |  |  |  | 8.50                  | S    | N=13 (1,2,2,3,4,4)                       |
|               |  |  |  | 9.70                  | S    | 50/125mm (12,25,27,23)                   |
|               |  |  |  | * Seating blows only. |      |                                          |

NB All depths in metres, all diameters in millimetres,  
water strike rise time in minutes, chiselling time in hours.

|         |            |
|---------|------------|
| Form    | CP HEADER  |
| Version | 2.00       |
| Revised | 23/06/1997 |